


Helsinki Straight Sliding Soffit Fix

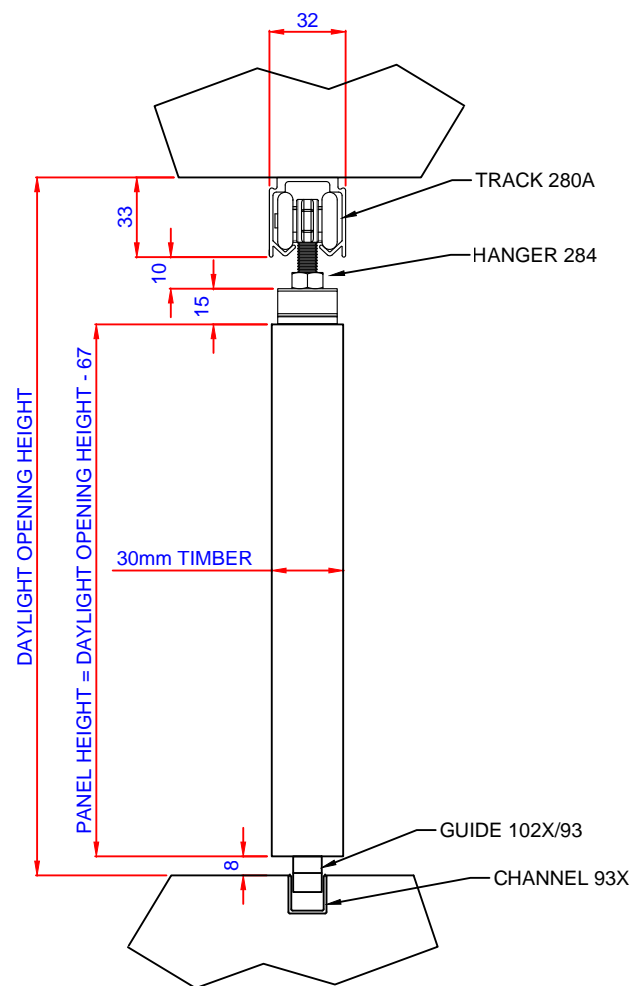

Application

- Helsinki straight sliding is a highly versatile sliding door system
- For use with medium weight doors
- Timber or aluminium doors
- Nylon wheels on aluminium track provide a smooth, silent ride
- Doors can slide to one or both sides
- The Helsinki system can be used both internally and externally
- This system is commonly used for aluminium shutters

Specification

For Individual Doors:

Max door height -	2400mm
Max door weight	200kg
Door thickness(mm)	16-30
Door height ≤ 3 times door width	

Gear Specification

Track:	280
Material	aluminium extrusion
Removable joint	280/RJ

Brackets:

For single track (face fixing)	281
Track can be drilled for soffit fixing	
Fix at 250-300mm centres (maximum)	

Fascia:

Soffit fixed track	280F
--------------------	------

Hangers 2 per door:

Wood Doors:	284
Wood Doors side plate	284L
Aluminium Doors concealed fix	284
Aluminium Doors Box section	285

Guides:

Aluminium Doors	106N/94
Wood Doors	TOR/94
	102N/93

Channel:

94B	brass extrusion
94X	aluminium extrusion
93X	aluminium extrusion

[Cad drawing available here](#)

Revision: 01-10-2018

SA Sliding Door Sales

9 Hereford Dr
Longmeadow Business
Estate West, Modderfontein,
Johannesburg
South Africa

Tel:+27 11 663 6600
Fax:+27 86 625 1435
sales1@hsdg.co.za
www.sasidingdoorsales.co.za